


**PRODUCT SPEC PAGE**

**Collection Name**

Tailor Made Patina

Colour is a vital ingredient in the charm and atmosphere of any interior and when we took on the challenge of creating our own bespoke products, colour was placed high upon our pedestal. The Tailor Made Patina collection is comprised of our largest selection of colours for both contemporary and antique spaces. This collection is all about personalities and the balance between the character of a colour and the interior elements that surround it. Specialist patinas created through the layering of organic compounds reveal a true depth of feeling unseen in flat commercial washes. Deep tonal variation and unique flushes of light yield an authentic personality to each product in this collection. Whether you're in pursuit of refined elegance, simple modernity or warm country ambience the Tailor Made Patina collection is the perfect accent to harmonise your project.

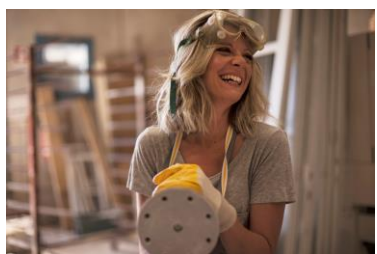

**Product Name**

Tobacco Cove From - £75 + VAT

**Product Information**

|                   |                                    |                              |                     |                        |                                      |   |  |
|-------------------|------------------------------------|------------------------------|---------------------|------------------------|--------------------------------------|---|--|
| Pattern<br>Planks | Construction<br>Solid / Engineered | Profile<br>Tongue and Groove | Edge<br>Micro Bevel | Finish<br>Hard Wax Oil | Installation<br>Glue and Secret Nail | Species<br>European Oak (Quercus Robur) | Origin<br>Top Layer: Europe / Base Layer: Russia |
|-------------------|------------------------------------|------------------------------|---------------------|------------------------|--------------------------------------|---|--|

**Product Structure**



**Solid**

Overall Thickness : 20mm  
 Length :18,5cm, 22cm, 24cm, 28cm  
 Width :0.6m-2.45m  
 Where the 80% of the batch is above 1.8m  
 Under Floor Heating :No



**Engineered**

|  |  |
|--|--|
| Overall Thickness : 21mm                 | Overall Thickness : 16mm                 |
| Hardwood Layer :6mm                      | Hardwood Layer :4mm                      |
| Birch Plywood Layer :15mm                | Birch Plywood Layer :12mm                |
| Length :18,5cm, 22cm, 24cm, 28cm         | Length :18,5cm, 22cm, 24cm, 28cm         |
| Width :0.6m-2.45m                        | Width :0.6m-2.45m                        |
| Where the 80% of the batch is above 1.8m | Where the 80% of the batch is above 1.8m |
| Under Floor Heating :Yes                 | Under Floor Heating :Yes                 |

**Engineered Flooring Guarantee**

This manufacturing guarantee is for all of our European Engineered oak wood floors, which have been manufacturing using Water Proof Boiled Birch ply. This Guarantee is against de-lamination only which occurs in the 12 months following installation of the flooring. If de-lamination occurs during that period, The Reclaimed Flooring Company, upon inspection and verification that none of the criteria (please refer to the guarantee section in the website) in respect of non-application of the guarantee are applicable, will repair or replace the board or boards that have de-laminated. No refunds of any kind will be given.

N.B. Sizes may change at any time

# Sustainability

FSC and PEFC  
Optional at extra cost

Timber Neutral  
Yes

EUTR  
Legally Harvested Timber

Formaldehyde Emission  
E1 (0.1ppm): complete compliance with  
EU safety standards

N.B. We plant 1 tree per every 10m2 you buy. Certification comes as standard.

# Grading

Grade : A-C

Maximum Open Filled Knot : 6cm

Maximum Size of Knots : 7,5cm

Filled Defects : Allowed

Sapwood : Traces Permitted

End Checks : No Longer Than Width of Board Allowed (Max 2mm Open)

Filler : 2 component solvent free filler with oak dust

Colour Variation : Allowed

Filled Crack : Allowed

N.B. The product grading criteria is an approximation. Please allow for variances.

# Tests

Slip Testing (to BS 7976-2) : Wet: 29 / Dried: 64

European reaction to fire classification : Cfl-s1

© This technical data sheet was written by The Reclaimed Flooring Company Limited, UK. At the time of writing and publication of the sheet, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.

## Central London, UK

64 Clerkenwell Road  
London, EC1M 5PX, UK  
+44 (0) 207 250 1108

## California, USA

[www.reclaimedflooringco.us](http://www.reclaimedflooringco.us)  
212 Marine Street, Suite 100  
Santa Monica, CA 90405  
+1 (424) 322-9200

## Trelleborg, Sweden

Värlinge Gamla Mejeri  
Värlingevägen 273-0, 231 94  
+46 40 685 06 80

## Cheshire, UK

Unit 3 Hammond Trade Centre  
Hammond Avenue, Stockport  
Cheshire SK4 1PQ, UK  
+44 (0) 161 429 9284